



Temp Minder Probe Battery Replacement

The battery in the Temp Minder probe must be replaced every 12-24 months. Below are instructions on how to replace the battery.


1. Locate the probe and using a small Phillips head screwdriver remove the screw from the bottom of the case. ***(Be sure not to lose the screw once it is removed).***



2. The probe case has two pieces that easily come apart once the screw is removed.



3. Remove and replace the dead battery. (Be sure to install battery with positive side facing up)

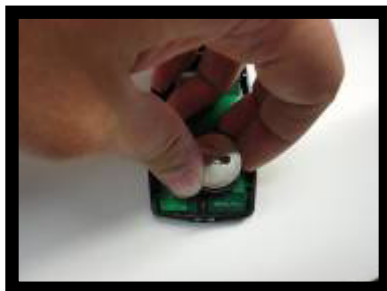

4. Close the case and insert the screw.

For support please contact tmsupport@goicc.com or call Integrated Control Corporation support at 631-673-5100